





Engine specification			Alternator specification	
<b>Brand</b>	<b>CUMMINS</b>		<b>Brand</b>	<b>DA</b>
<b>Model</b>	<b>6CTA8.3-G2</b>		<b>Model</b>	<b>DAI270G</b>
Air Intake System	Turbo, Water/Air Cooling		Number of Phase	3
Fuel System	PB type fuel pump		Connecting Type	“Y” type connecting
Cylinder Arrangement	6 in line		Number of Bearing	1
Displacement	8.3L		Power Factor	0.8
BorexStroke	114*135 mm		Protection Grade	IP23
Compression Ratio	17.0:1		Altitude	≤1000m
Governor Type	Electronic Governor		Exciter Type	Brushless, self-exciting
Frequency Regulation, Steady State:	≤1.5%		Insulation Class, Temperature Rise	H/H
Starting system	E		Alternator Capacity	218.5KVA
Battery voltage	12VDC		Telephone Influence Factor (TIF)	<50
Fuel consumption(GL/h )			THF	<2%
	100% load	11.6	Voltage Regulation, Steady State	≤±1%
	75% load	8.7	Alternator Efficiencies	92.4%
	50% load	6.07	Air Cooling Flow	0.514m3/s

Exhaust System		Air Intake System	
Exhaust Gas Flow	36.4m3/min	Max Intake Restriction	6kPa
Exhaust Temperature	570°C	Burning Capacity	13m3/min
Max Back Pressure	10kPa	Intake Flow	250m3/min

Oil System		Cooling System	
Total Oil Capacity	23.8L	Total Coolant Capacity	34L
Oil Consumption	≤4g/kwh	Thermostat	82-95°C
Engine Oil Tank Capacity	18.9L	Max Water Temperature	104°C
Oil Pressure at Rated RPM	276-414kPa		



**Control system**

**Deepsea brand DSE6020 (Standard)**

Features:

- Auto start and Auto mains failure control to the genset
- Display of generator cumulated electric energy
- Using microprocessor as a core, graphics LCD with big screen and backlight
- PC and front panel configuration
- Built-in speed/frequency detecting units can accurately judge the states such as crank success and over speed
- Modular configuration design, inserted type connection terminals, flush type installation, compact structure, easy installation
- All parameters use digital modulation, abandoning analog modulation using conventional electronic potentiometer, reliability and stability are increased
- Built-in watch dog can never be dead halt, ensuring smooth program execution
- Analog oil pressure, water temperature, fuel level, battery voltage, engine speed
- 3 phase Generator protections:
  - Over-/under voltage
  - Over-/under frequency
  - Current/voltage asymmetry
  - Overcurrent/overload



- Security password-protected programming levels
- Generator measurements (50/60 Hz): U1-U3, I1-I3, Hz, kW, kVAr, kWh

**Deepsea brand DSE7320 (Option)**

Features:

- Auto Mains (Utility) Failure control module
- Remote PC and via SMS textalerts (with external modem)
- LED and LCD alarm indication
- Include USB, RS232 and RS485 ports
- Support for up to three remote display units
- Generator measurements (50/60 Hz): U1-U3, I1-I3, Hz, kW, kVAr, kWh
- Charge alternator failure alarm
- 3 phase Generator protections:
  - Over-/under voltage
  - Over-/under frequency
  - Current/voltage asymmetry
  - Overcurrent/overload
- Analog oil pressure, water temperature, fuel level, battery voltage, engine speed
- Load switching (load shedding and dummy load outputs)
- CAN and Magnetic Pick-up/Alt.sensing
- Automatic load transfer






**Optional parts**

Engine	Fuel System	Control System
● Heater	● Daily Fuel Tank	● Remote Control Panel
● Battery Charger	● Water Separator	● Auto Transfer Switch
	● Fuel Level Sensor	● Paralleling System
Alternator	Others	Data
● Anti Condensation Heater	● Soundproof Type	● Engine Parts Drawing List
● Drop CT (For Paralleling)	● Trailer Type	● Spare parts
● PMG	● Containerized Type	


**Dimension and Weight**

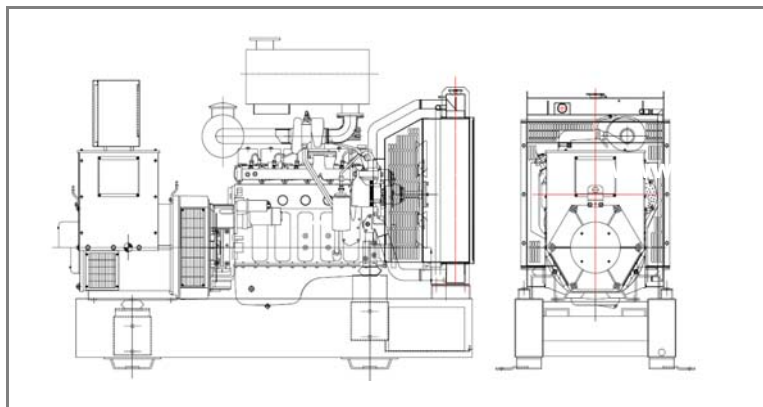

**Open Type Genset**

Dimension: 2500x1000x1710 mm

Weight: 1950 kg

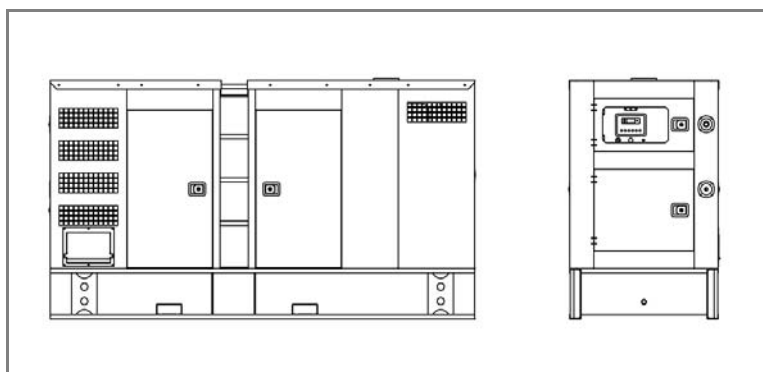

**Soundproof Type Genset**

Dimension: 3200x1200x1950 mm

Weight: 2700 kg

**ENERGY360**

Kra42 #54a 71 Bdg 101 Itagüi PBX: (4)5600530

E-mail: [info@energy360.com.co](mailto:info@energy360.com.co)

