



Engine specification		Alternator specification		
Brand		DOOSAN	Brand	MECC ALTE
Model		DP086TA	Model	ECP34 2L4A
Air Intake System		Turbo charged & intercooled	Number of Phase	3
Fuel System		BOSCH type in-line fuel pump	Connecting Type	"Y" type connecting
Cylinder Arrangement		6 in line	Number of Bearing	1
Displacement		8.071L	Power Factor	0.8
Bore×Stroke		111×139 mm	Protection Grade	IP23
Compression Ratio		16.7:1	Altitude	≤1000m
Governor Type		Electronic Governor	Exciter Type	Brushless, self-exciting
Frequency Regulation, Steady State:		≤1.5%	Insulation Class, Temperature Rise	H/H
Starting system		E	Alternator Capacity	190KVA
Battery voltage		12VDC	Telephone Influence Factor (TIF)	<50
	100% load	41.3	THF	<2%
Fuel consumption(L/h)	75% load	30.3	Voltage Regulation, Steady State	≤±1%
	50% load	21	Alternator Efficiencies	92.4%
	25% load	11.5	Air Cooling Flow	0.514m3/s

Exhaust System		Air Intake System	
Exhaust Gas Flow	44.6m3/min	Max Intake Restriction	6.23kPa
Exhaust Temperature	582 ℃	Cooling Fan Air Flow	224m3/min
Max Back Pressure	5.9kPa	Intake Air Flow	21.28m3/min

Oil System		Cooling System	
Max Oil Capacity	15.5L	Total Coolant Capacity	44L
Oil Consumption	TBD	Thermostat	71-85 ℃
Max oil temperature	120℃	Max Water Temperature	103 ℃
Oil Pressure at Rated RPM	≥250kpa		



Control system

Deepsea brand DSE7320 (Standard)

Features:

- Auto Mains (Utility) Failure control module
- Remote PC and via SMS textalerts (with external modem)
- LED and LCD alarm indication
- Include USB, RS232 and RS485 ports
- Support for up to three remote display units
- Generator measurements (50/60 Hz): U1-U3, I1-I3, Hz, kW, kVAr, kWh
- Charge alternator failure alarm

- 3 phase Generator protections:
- -Over-/under voltage
- -Over-/under frequency
- -Current/voltage asymmetry
- -Overcurrent/overload
- Analog oil pressure, water temperature, fuel level, battery voltage, engine speed
- Load switching (load sheddingand dummy load outputs)
- CAN and Magnetic Pick-up/Alt.sensing
- Automatic load transfer






Optional parts

Engine	Fuel System	Control System
Heater	● Daily Fuel Tank	Remote Control Panel
Battery Charger	 Water Separator 	Auto Transfer Switch
	● Fuel Level Sensor	Paralleling System
Alternator	Others	Data
Anti Condensation Heater	Soundproof Type	● Engine Parts Drawing List
● Drop CT(For Paralleling)	Trailer Type	Spare parts
● PMG	Containerized Type	


Dimension and Weight

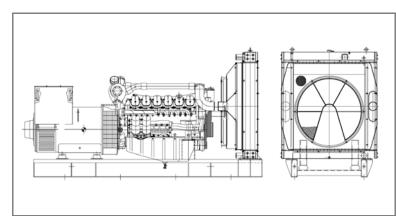


Open Type Genset

Dimension: 2800×1050×1600 mm

Weight: 1700 kg

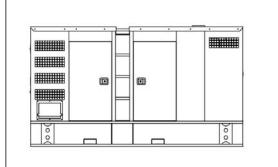



Soundproof Type Genset

Dimension: 3300×1250×1950 mm

Weight: 2300 kg

ENERGY360

Kra42 #54A 71 INT101 ITAGUI. PBX: (4)5600530

E-mail:info@energy360.com.co

